
AIR

MA

FABER COOKER HOODS
2018 COLLECTION



CHOOSING A "GREEN" PRODUCT IS EASIER THAN EVER BEFORE, THANKS TO THE FULLY TRANSPARENT ENERGY LABEL!

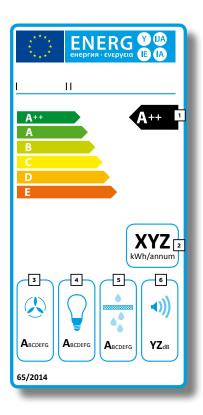

1_Energy Class: this is the energy efficiency of the hood. This parameter takes into account the hood's power consumption both for extraction purposes and for lighting: the lower the power consumption, the higher the class.

Basically, the energy class is defined by an Energy Efficiency Index (EEI) parameter obtained as the ratio between the actual consumption of the hood in question and the consumption of a standard hood: the closer the actual consumption of the hood to the standard consumption, the lower the EEI and the higher the class (A, B, C, etc.).

- **2_AEC:** this is the the annual electricity consumption of the hood, estimating the light of the hood to be kept on for 120 minutes a day and the hood to be operational for 60 minutes a day.
- **3_FDE**: this is the fluid dynamic efficiency of the hood. At constant power consumption, the greater the hood efficiency, the greater the air extraction; or, at constant air extraction, the greater the hood efficiency, the lower the power consumption.
- **4_LE:** this is the lighting efficiency of the hood. At constant illuminating capacity, the greater the hood efficiency, the lower the power consumption.
- **5_GFE**: this is the grease filtering efficiency of the hood, i.e. how much grease the filter can retain.
- **6_NOISE**: noise of the hood at maximum, not intensive speed.

BEST IN THE WORLD FOR EXCELLENCE

- We were the first in the kitchen hood sector to obtain an ISO 9001 company qualitysystem certificate.
- System integrated with Quality, Safety and Environment certified by SGS respecting the ISO 9001:2000, OHSAS 18001 and ISO 14001 norms.
- We have received the SGS Excellence Certificate, the absolute first in the world, n°001.
- The main international bodies for certification and approval have honored Faber's commitment to quality allowing our trial laboratory to carry out tests which recognize the conformity of products with the most stringent security requirements.
- All Faber hoods conform to European safety standards (EC mark of conformity), and have also been certified by the IMQ, a reliable, independent organisation further guaranteeing clients on quality (IMQ mark of security).

AIR

MA

AIR MATTERS


Air is without substance: a free spirit. At Faber we can weigh it, measure it, adapt it and shape it like solid matter. Air has been our substance for more than 60 years. Air technology is the reason we work. We are confident about our achievements because we know how to handle it.

тте

R S



Thalia 56

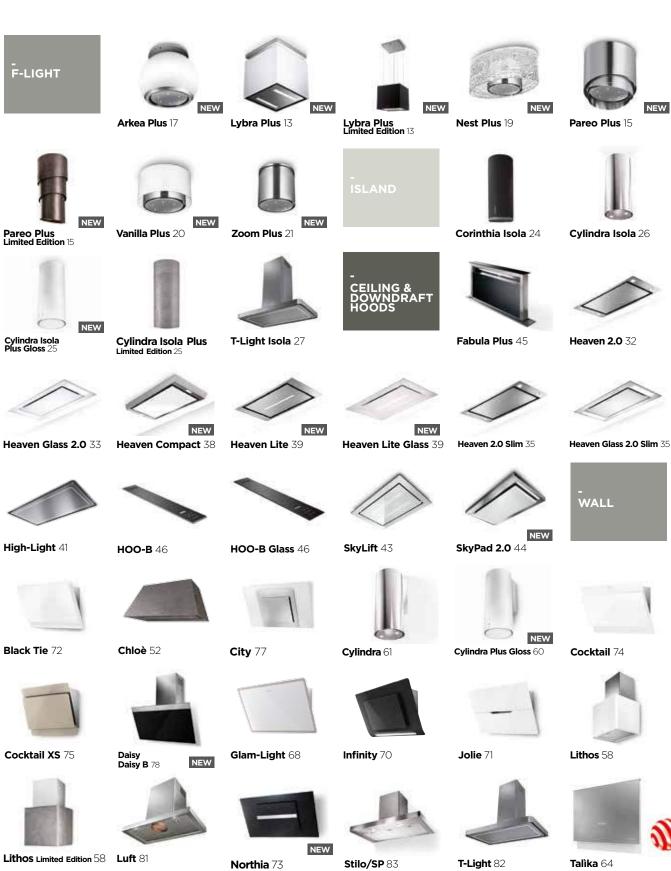

Veil 54

Vanity 76



reddot award 2017 winner

NEW





 $\textbf{Veil} \; \textbf{Limited} \; \textbf{Edition} \; 54$

Stilo Isola 112

Stilo 111

Stilnovo Lux 109





STEAM OFF SYSTEM

Banish steam from your kitchen.



Lower consumption. Higher efficiency.



SIL-K ACT

Stop that noise!





HIGH FILTERING

Take a deep breath.

Real innovation makes life better.

At Faber, we don't innovate for innovation's sake. We think technical progress should make things better for people and the planet. That's why we put so much effort into designing and manufacturing life-oriented products.

Years of research have allowed us to develop some pretty unique solutions. For example, Faber hoods combine superb performance with minimal energy consumption, silent operation with perfect functionality, and Italian style with unbeatable quality.

Others might stop here, but we see this only as a starting point. Because for Faber, innovation means making good things even better.

Energy saving technologies

VAUTILUS



EVO DIFFUSE



The new Faber diffuser enables a leap in energy quality from Class C to Class A*.

It also provides high performance with low power consumption, due to its optimised geometry and the fluid dynamic analysis of the impeller.

* for built-in hoods

The Energy diffuser has evolved with an optimised geometry that yields excellent results in terms of energy efficiency, reduced power consumption and noise level thanks to indepth fluid dynamics studies.

RUSHLESS



The brushless motor guarantees considerable energy saving coupled with high extraction efficacy.

It is the most silent motor on the

market and its performance remains stable in any usage condi-

ENERGY



Energy Diffuser: it reduces noise up to 3dB(A) and higher hood efficiency by 30% even in the presence of long air outlet.

7 / FABER

The technologies that make FABER hoods more effective And easy to use

REMOTE 3LOWER



The ability to install the motor away from the hood frees it from architectural constraints and reduces noise in the kitchen.

SOUBLE ASPIRATION

Double extraction is derived from the overlapping of two glasses in vertical hoods, ensuring greater hood effectiveness.

PERIMETER ASPIRATION



Reduces the perceived sound by 25% (*).

This aspiration guarantees optimised effectiveness exploiting the principle of the Venturi effect: air accelerates as it passes through the constricted extraction space of the panel and then decreases immediately inside the hood and is then easily expelled without need for any particular pressure.

(*) Equal to a reduction of 3dB(A) according to norm EN 60704-3

UP & DOWN



The Up & Down movement of the hood is operated by remote control and allows the hood to be gently lowered towards the hob increasing its efficiency.

S.O.S



The Faber Steam Off System totally eliminates the condensation that can form under and around the hood. Air jets are released from the hood which creates two air vortexes that control the intake of smoke and steam.

/ FABER

Technologies that make FABER hoods more functional

SPEED I



Intensive speed: function which activates maximum aspiration for 6 minutes to meet special cooking needs.

DELAY 30

Delayed switch-off: allows automatic delayed switching off of the motor to complete elimination of residual odours.

HOUR 24



The Key 24 function allows the hood to be switched on for 24 hours a day for continuous air renewal with a level of noise that is imperceptible.

FILTER ALARM



Filter saturation alarm: warns you when it is time to clean the anti-grease filter or substitute the anti-odour filter.

SONTROL



Remote control: Faber hoods with electronic commands come with remote controls, which are particularly useful for people with reduced mobility.

COMFORT LIGHT



Courtesy light: reduced hood light intensity with the simple press of a button. Thanks to its low level of energy consumption, the courtesy light can be left on for long periods of time.

LIGHT




Dimmer light: adjusts hood courtesy light with the simple press of a button to meet all your kitchen needs.

ONNECTION



Creating a hob and hood that talk to each other is another first from Faber. Now you can control your hood directly from the hob, thanks to clever technology built into the induction zone.

The greenest brand.





ENERGY EFFICIENCY: HALF OF FABER'S HOODS ARE ALREADY IN CLASS A OR A+.

Faber hoods consume less, reduce emissions and deliver great performance thanks to the new EVO diffuser. Many models also incorporate LED lighting to enhance your kitchen, slash your energy bills and provide bright, natural light over the entire hob.



EVO DIFFUSER

Lower consumption, higher performance. Silently!

The EVO diffuser embodies the latest research in fluid dynamics and delivers amazing results in terms of energy efficiency, cost savings and noise reduction. The EVO diffuser is perfectly effective even with long extraction ducts.



LED LIGHT Less consumption, more light. Naturally!

At last! A pleasant, natural light (4100°K) that shows things in their true colours. Faber's LED spots blend stylishly into the hood and provide bright light for excellent visibility over the entire cooking area. They consume less energy too!

F-LIGHT

The selection of beautiful Faber F-Light island hoods are all equipped with Up & Down technology which increases the hoods efficiency by gently lowering it towards the hob and raising it back up toward the celling when not in use.

UP & DOWN Freedom of movement.



A BRIGHT IDEA FROM FABER GIVES YOU FREEDOM OF MOVEMENT IN THE KITCHEN.
F-LIGHT: HOOD AND CEILING LIGHT IN ONE.

Exclusive technology from Faber, complete with remote control. DOWN: the hood descends over the hob for maximum extraction efficiency. UP: the hood retracts to ceiling level to let you move freely around the kitchen.



DESIGN AND WELLBEING TOGETHER IN A ENERGY CLASS.

All F-light models are in A energy class, stylish in form and unbeatable in function, Faber's F-LIGHT hoods are inspired by the latest trends in design and lighting technology. F-LIGHT technology transforms the hood into an attractive source of light for the whole kitchen. With Faber, life keeps getting better!



At last! A pleasant, natural light (4100°K) that shows things in their true colours. Faber's new Micro LED spots blend stylishly into the hood and provide bright light for excellent visibility over the entire cooking area. They consume less energy too!
















Lybra, ducted version



LYBRA PLUS

LYBRA PLUS cod. 110.0255.507

LYBRA PLUS BLACK STRIPED cod. 110.0393.250 Limited Edition





















FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0158.127
· Stainless steel / Glass · Zebra - striped glass	Air capacity IEC point	270 340 430 620	FHP8 Charcoal filter High
Controls	Pressure	400 460 530 560	Performance
Electronic	Input	120 150 190 270	Cod. 112.0169.216
Lighting			F-LIGHT ducting kit
2 LED Lights	Noise level	52 58 64 71	Cod. 112.0185.278
Grease filter			FLL8 Charcoal filter
Cassettes dishwasher safe			Long Lasting
Ø of air outlet			
150 mm			
Width			
409 mm			
Energy class			
A			





PAREO PLUS

PAREO PLUS cod. 345.0492.593

PAREO PLUS TIBETAN SILVER cod. 345.0492.594 Limited Edition
























FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	-
· Stainless steel · Tibetan silver	Air capacity IEC point	270 340 430 620	
Controls	Pressure	400 460 530 560	
Electronic	 Input	120 150 190 270	
Lighting			
Micro LED Lights	Noise level	52 58 64 71	
Grease filter			
Cassettes dishwasher safe			
Ø of air outlet			
150 mm			
Width			
500 mm			
Energy class			
A			











ARKEA PLUS

ARKEA PLUS cod. 345.0492.562





















You can control your hood directly from the hob thanks to clever technology built into the induction zone

FEATURES
Finish
· Stainless steel / Polycarbonate
Controls
Electronic
Lighting
Micro LED Lights backlighting lamps
Grease filter
Cassettes dishwasher safe
Ø of air outlet
150 mm
Width
600 mm
Energy class
*


PERFORMANCES					ACCESSORIES
Speed	1	2	3	INT	Cod. 112.0158.127
Air capacity IEC point	270	340	430	620	FHP8 Charcoal filter High Performance
Pressure	-	-	-	-	. 6.16.1116.1
Input	120	150	190	270	FLL8 Charcoal filte
Noise level	52	58	64	71	Long Lasting



Arkea features LED RGB ambience lighting, allowing you to choose your favou-rite colour or alternate all colours in a loop.

al filter Long Lasting

^{*} Data not declared, as the model is exclusively available in the recycling version

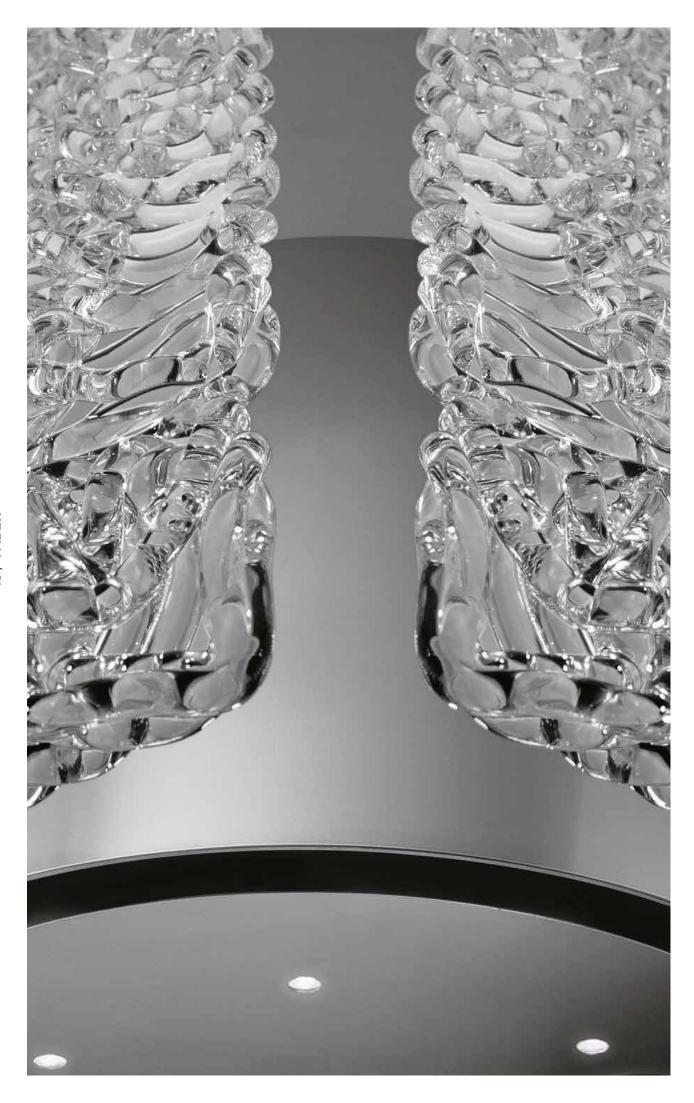










Nest, ducted version



NEST PLUS

NEST PLUS cod. 345.0492.592





















FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0158.127
· Stainless steel / Glass	Air capacity IEC point	270 340 430 620	FHP8 Charcoal
Controls			filter High Performance
Electronic	Pressure	400 460 530 560	Cod. 112.0169.216
Lighting	Input	120 150 190 270	
Micro LED Lights	Noise level	52 58 64 71	F-LIGHT ducting kit
Grease filter			Cod. 112.0185.278
Cassettes dishwasher safe			FLL8 Charcoal filter Long Lasting
Ø of air outlet			3 3
150 mm			
Width			
860 mm			
Energy class			
A			








Vanilla, ducted version

VANILLA PLUS

VANILLA PLUS cod. 345.0492.591























нооряно

FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0158.127
· Stainless steel / Glass	Air capacity IEC point	270 340 430 620	FHP8 Charcoal filter High
Controls		270 340 430 020	Performance
Electronic	Pressure	400 460 530 560	a . I
Lighting	Input	120 150 190 270	Cod. 112.0169.216
Micro LED Lights	Noise level	52 58 64 71	F-LIGHT ducting kit
			Cod. 112.0185.278
Grease filter			FLL8 Charcoal filter
Cassettes dishwasher safe			Long Lasting
Ø of air outlet			
150 mm			
Width			
520 mm			
Energy class			
A			










Zoom versione aspirante Zoom, ducted version



ZOOM PLUS

ZOOM PLUS cod. 345.0492.568





















HOOD&HOB

FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0158.127
·Stainless steel	Air capacity IEC point	270 340 430 620	FHP8 Charcoal filter High
Controls			Performance
Electronic	Pressure	400 460 530 560	Cod. 112.0169.216
Lighting	Input	120 150 190 270	
Micro LED Lights	Noise level	52 58 64 71	F-LIGHT ducting kit
			Cod. 112.0185.278
Grease filter			FLL8 Charcoal filter
Cassettes dishwasher safe			Long Lasting
Ø of air outlet			
150 mm			
Width			
400 mm			
Energy class			
A			

ISLAND

Island workstations provide a focal point in the kitchen. The selection of a beautiful Faber Island hood will both enhance this space and provide effective extraction in your cooking area.






WH MATT/TS
White matt/Tibetan silver



DG MATT/CONCRETE
Dark grey matt/Concrete



X/OM Stainless steel/Old metal



CORINTHIA ISOLA

CORINTHIA ISOLA EV8+ WH MATT/TS A37 cod. 110.0456.219
CORINTHIA ISOLA EV8+ DG MATT/CONCRETE A37 cod. 110.0456.220
CORINTHIA ISOLA EV8+ X/OM A37 cod. 110.0456.261


















FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.243
White matt / Tibetan silver Dark grey matt / Concrete Stainless steel / Old metal	Air capacity IEC point	260 365 480 600	F9 Charcoal filter
Controls	Pressure	390 500 510 530	Cod. 112.0157.354
Squarcle touch	Input	170 215 245 275	Remote control
Lighting	Noise level	56 62 68 71	Cod. 112.0185.276
Micro LED lights			FLL9 Charcoal filter Long Lasting
Grease filter			
Cassettes dishwasher safe			
Ø of air outlet			
150 / 120 mm			
Width			
370 mm			
Energy class			
A			





Limited Edition





To be installed at a minimum distance from the hob of 55 cm.

CYLINDRA ISOLA PLUS GLOSS

CYLINDRA ISOLA PLUS GLOSS EV8+ WH A37 cod. 335.0492.563

CYLINDRA ISOLA PLUS CONCRETE A37 cod. 335.0492.564

Limited Edition

















ACCESSORIES

FEATURES	PERFORMANCES	
Finish	Speed	
· White · Concrete	Air capacity IEC point	
Controls	Pressure	
Electronic Led Feel touch (Concrete)	Input	
Lighting	Noise level	
Micro LED Lights		
Grease filter		
Cassettes dishwasher safe		
Ø of air outlet		
150 / 120 mm		
Width		
370 mm		
Energy class		
Δ		

Speed	1	2	3	INT
Air capacity IEC point	280	420	580	680
Pressure	430	500	530	545
Input	190	230	255	270
Noise level	56	62	68	71


2 3 INT	Cod. 112.0157.243
0 420 580 680	F9 Charcoal filter
0 500 530 545	Cod. 112.0157.354
230 255 270	Remote control
62 68 71	Cod. 112.0327.007

blower kit		
Cod. 112.0157.267		
Upper chimney kit X		
Cod. 112.0185.276		

ENERGY Remote

FLL9 Charcoal filter Long Lasting





CYLINDRA ISOLA

Installare ad una distanza minima dal piano cottura di **55 cm**. To be installed at a minimum

To be installed at a minimum distance from the hob of **55 cm**.

CYLINDRA ISOLA EV8 X A37 ELN cod. 110.0332.308















l) (c

FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.243
· Stainless steel	Air capacity	700.460.500.650	F9 Charcoal filter
Controls	IEC point	300 460 590 650	
Electronic Led	Pressure	350 450 480 490	Cod. 112.0157.354
Lighting	Input	145 180 230 250	Remote control
2 LED lights	Noise level	56 62 68 71	Cod. 112.0327.007
Grease filter			ENERGY Remote blower kit
Cassettes dishwasher safe			Cod. 112.0157.267
Ø of air outlet			Cod. 112.0157.267
150 / 120 mm			Upper chimney kit X
Width			Cod. 112.0185.276
370 mm			FLL9 Charcoal filter
Energy class			Long Lasting
C			



T-LIGHT ISOLA

T-LIGHT ISOLA EV8+ X A100 cod. 110.0456.264
T-LIGHT ISOLA EV8+ WH MATT A100 cod. 110.0456.265

















FEATURES	PERFORMANCES		ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0157.243	
· Stainless steel · White matt	Air capacity IEC point	290 420 580 690	F9 Charcoal filter	
Controls	Pressure	410 470 520 530	Cod. 112.0157.354	
Squarcle touch	Input	190 230 255 270	Remote control	
Lighting	Noise level		Cod. 112.0185.276	
Perimeter LED light	Noise level	50 58 65 68	FLL9 Charcoal filter	
Grease filter			Long Lasting	
Cassettes dishwasher safe				
Ø of air outlet				
150 / 120 mm				
Width				
1000 mm				
Energy class				
A				






CEILING & DOWNDRAFT HOODS

If you want discrete efficient extraction, a ceiling or downdraft hood may be the perfect choice. Faber ceiling hoods use perimeter extraction for increased efficiency whilst the Fabula offers flexible downdraft extraction.



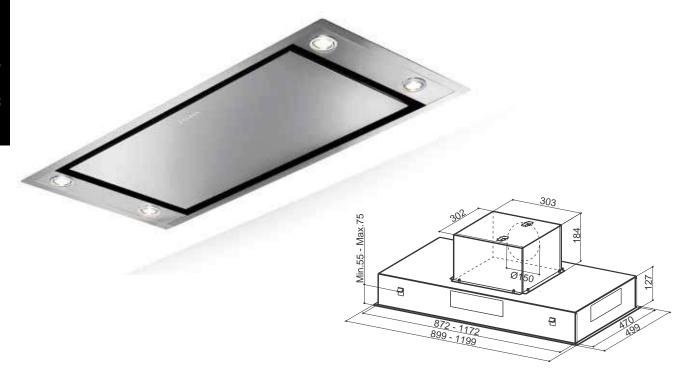

HEAVEN 2.0

Air outlet adjustable in 4 positions

HEAVEN 2.0 EV8+ X 90 cod. 110.0315.792 **HEAVEN 2.0 EV8+ X 120** cod. 110.0315.794

























You can control your hood directly from the hob thanks to clever technology built into the induction zone

FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.240
· Stainless steel	Air capacity		F8 Charcoal filter
Controls	IEC point	290 400 560 700	
Electronic Led	Pressure	430 490 530 560	Cod. 112.0327.007
Lighting	Input	190 230 255 270	ENERGY Remote blower kit
4 LED lights	Noise level	53 62 70 72	Cod. 112.0158.127
Grease filter			FHP8 Charcoal
Cassettes dishwasher safe			filter High Performance
Ø of air outlet			Cod. 112.0185.278
150 / 120 mm			FLL8 Charcoal filter
Width			Long Lasting
900 / 1200 mm			
Energy class			
Δ			



HEAVEN GLASS 2.0

Air outlet adjustable in 4 positions

HEAVEN GLASS 2.0 EV8+ WH A90 cod. 110.0315.503 HEAVEN GLASS 2.0 EV8+ WH A120 cod. 110.0374.230

























FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.240
· White glass	Air capacity IEC point	290 400 560 700	F8 Charcoal filter
Controls			Cod. 112.0327.007
Electronic Led	Pressure	430 490 530 560	
Lighting	Input	190 230 255 270	ENERGY Remote blower kit
2 LED lights	Noise level	53 62 70 72	Cod. 112.0158.127
Grease filter			FHP8 Charcoal filter High
Cassettes dishwasher safe			Performance
Ø of air outlet			Cod. 112.0185.278
150 / 120 mm			FLL8 Charcoal filter
Width			Long Lasting
900 / 1200 mm			
Energy class			
A			







Heaven Glass 2.0 Slim



Heaven 2.0 Slim

HEAVEN GLASS 2.0 SLIM HEAVEN 2.0 SLIM

HEAVEN GLASS 2.0 WH SLIM A90 cod. 110.0428.440 **HEAVEN GLASS 2.0 WH SLIM A120** cod. 110.0428.451

HEAVEN 2.0 X SLIM A90 cod. 110.0428.452 **HEAVEN 2.0 X SLIM A120** cod. 110.0428.453
























ноор&но

You can control your hood directly from the hob thanks to clever technology built into the induction zone

FEATURES	PERFORMANCES		ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0471.608	
· White glass · Stainless steel	Air capacity IEC point	480 550 620 700	FLL18-90 Charcoal filter Long Lasting	
Controls	Pressure	310 410 520 690	Cod. 112.0471.609	
Electronic Led	Input	60 85 110 145	FLL18-120	
Lighting	<u> </u>		Charcoal filter Long Lasting	
2 LED lights 4 LED lights (s. steel model)	Noise level	63 66 70 72	Lusting	
Grease filter				
Cassettes dishwasher safe				
Ø of air outlet				
220 x 90 mm				
Width				
900 / 1200 mm				
Energy class				
A+				





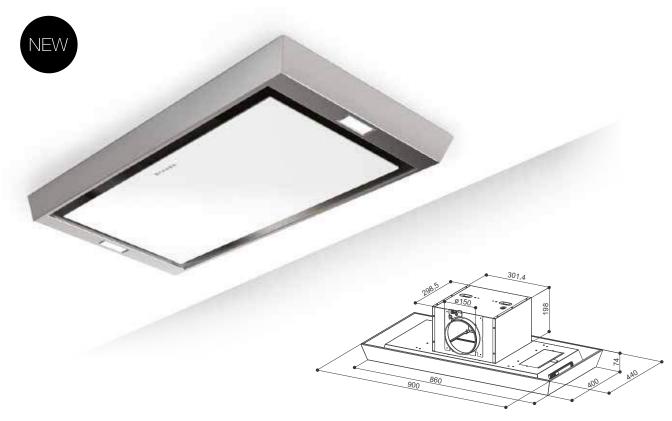

Air outlet adjustable in 4 positions

HEAVEN COMPACT

HEAVEN COMPACT EV8 X A90 cod. 350.0504.298






















You can control your hood directly from the hob thanks to clever technology built into the induction zone

FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.240
· Stainless steel	Air capacity IEC point	300460580640	F8 Charcoal filter
Controls		300460 380 640	
Electronic Led	Pressure	360 440 500 510	Cod. 112.0158.127
Lighting	Input	145 180 230 250	FHP8 Charcoal filter High Performance
2 LED lights	Noise level	53 63 68 70	renormance
Grease filter			Cod. 112.0185.278
Cassettes dishwasher safe			FLL8 Charcoal filter Long Lasting
Ø of air outlet			
150 / 120 mm			
Width			
900 mm			
Energy class			
С			






Air outlet adjustable in 4 positions

Heaven Lite





Air outlet adjustable in 4 positions

Heaven Lite Glass

HEAVEN LITE GLASS

HEAVEN LITE EV8+ X A90 cod. 350.0529.507 **HEAVEN LITE EV8+ X A120** cod. 350.0529.508 **HEAVEN LITE GLASS EV8+ WH A90** cod. 350.0529.509 **HEAVEN LITE GLASS EV8+ WH A120** cod. 350.0529.510



Α



















HOOD&HOB



(optional)

You can control your hood directly from the hob thanks to clever technology built into the induction zone

FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.240
· White glass	Air capacity IEC point	290 400 560 700	F8 Charcoal filter
Controls			Cod. 112.0327.007
Electronic Led	Pressure	430 490 530 560	
Lighting	Input	190 230 255 270	ENERGY Remote blower kit
LED lights	Noise level	53 62 70 72	Cod. 112.0158.127
Grease filter			FHP8 Charcoal
Cassettes dishwasher safe			filter High Performance
Ø of air outlet			Cod. 112.0185.278
150 / 120 mm			FLL8 Charcoal filter
Width			Long Lasting
900 / 1200 mm			
Energy class			





HIGH-LIGHT

HIGH-LIGHT RAD BRS X A91 cod. 110.0456.185 HIGH-LIGHT RAD BRS X A121 cod. 110.0456.205

HIGH-LIGHT RAD BRS WH MATT A91 cod. 110.0456.206 **HIGH-LIGHT RAD BRS WH MATT A121** cod. 110.0456.207



























You can control your hood directly from the hob thanks to clever technology built into the induction

FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0471.608
· Stainless steel · White matt	Air capacity IEC point	415 490 550 710	F18-90 Charcoal filter
Controls	Pressure	320 410 530 700	Cod. 112.0471.609
Electronic Led	Input	55 85 110 145	F18-120 Charcoal
Lighting		07.05.00.71	filter
Perimeter LED light	Noise level	63 65 68 71	
Grease filter			
Cassettes dishwasher safe			
Ø of air outlet			
220 x 90 mm			
Width			
910 / 1210 mm			
Energy class			
A+			



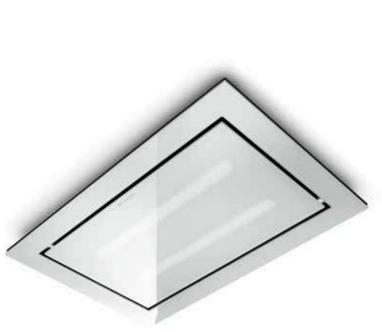



SKYLIFT

SKYLIFT cod. 110.0324.939















HOOD&HOB


You can control your hood directly from the hob thanks to clever technology built into the induction zone $\frac{1}{2}$

CHARCOAL FILTER SUPPORTED

FEATURES	PERFORMANCES						ACCESSORIES
Finish	Speed	1	2	3	4	INT	-
· White glass	Air capacity IEC point	110	105	260	717	430	-
Controls		110	155	200	7 313	450	-
Electronic	Pressure	-	-	-	-	-	
Lighting	Input	30	45	55	70	100	-
2 LED lights	Noise level	48	53	58	62	69	-
Grease filter							
Cassettes dishwasher safe							
Ø of air outlet							
-							
Width							
900 mm							
Energy class							
_ *							

 $^{^{\}ast}$ Data not declared, as the model is exclusively available in the recycling version



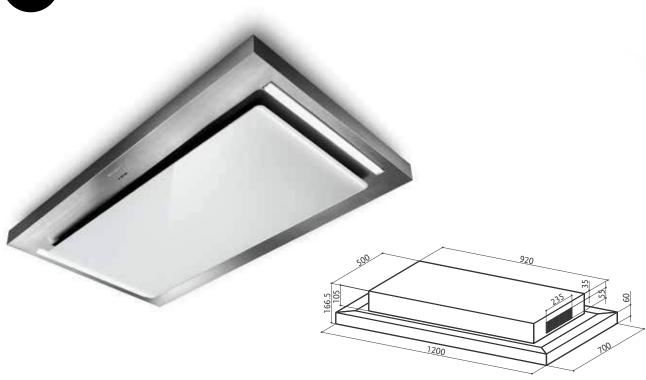

SKYPAD 2.0

Model not built-in into the ceiling

SKYPAD 2.0 X/WH F120 cod. 110.0479.462


















ноорано

You can control your hood directly from the hob thanks to clever technology built into the induction zone

CHARCOAL FILTER SUPPORTED

FEATURES	PERFORMANCES					ACCESSORIES
Finish	Speed	1	2	3	INT	-
· Stainless steel / White glass	Air capacity					
Controls	IEC point	440	2600) 78C	850	
Electronic Led	Pressure	-	-	-	-	
Lighting	Input	60	90	140	180	
2 LED lights	Noise level	57	64	70	72	
Grease filter						
Cassettes dishwasher safe						
Ø of air outlet						
-						
Width						
1200 mm						
Energy class						
_ *						
Blowers						
2						

 $^{^{\}ast}$ Data not declared, as the model is exclusively available in the recycling version.

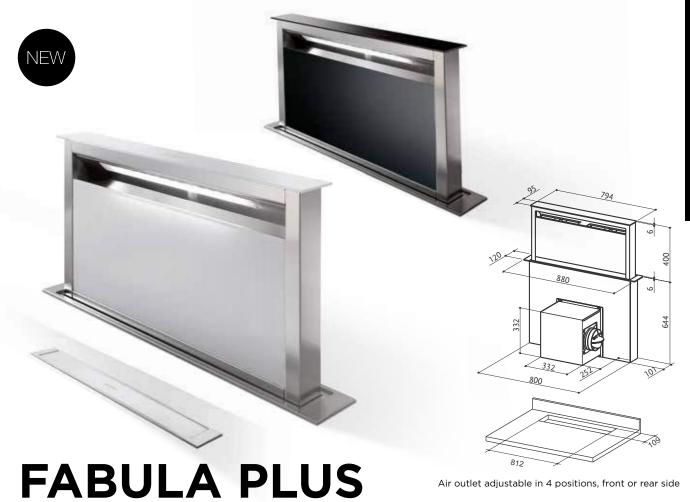

FABULA PLUS EV8+ BK A90 cod. 340.0492.566 FABULA PLUS EV8+ WH A90 cod. 340.0492.567























FEATURES	PERFORMANCES
Finish	Speed
· Stainless steel / Black glass · Stainless steel / White glass	Air capacity IEC point
Controls	Pressure
EVO Touch control	Fiessule
	Input
Lighting	
LED lights	Noise level
Grease filter	
Cassettes dishwasher safe	
Ø of air outlet	

Energy	class

150 / 120 Width 900 mm

Energy class	
Life gy class	
Α	

Speed	1	2	3	4	INT
Air capacity IEC point	160	290	350	439	700
Pressure	100	390	460	540	560
Input	55	120	155	210	270
Noise level	40	53	54	60	70

peed	1	2	3	4	INT	Cod. 112.0261.258
ir capacity EC point	160	290	350	439	700	F12 Charcoal filter
ressure	100	390	460	540	560	Cod. 112.0157.354
put	55	120	155	210	270	Remote control
oise level	40	53	54	60	70	Cod. 112.0327.008

Cou. 112.0201.236
F12 Charcoal filter
Cod. 112.0157.354
Remote control
Cod. 112.0327.008


ACCESSORIES


Remote blower kit Fabula

Cod. 112.0470.541*

Rectangular ducting recycling kit

* To be purchased in addition or as an alternative to the charcoal filter





Island installation

MIN.563-MAX.713 520 MIN.548-MAX.698 MAX.560 MAX.560

HOO-B HOO-B GLASS

HOO-B BK/A A52 cod. 110.0456.212 **HOO-B GLASS BK A52** cod. 110.0456.467



46 / FABER









FEATURES	PERFORMANCES					ACCESSORIES
Finish	Speed	1	2	3	INT	Cod. 112.0470.541
· Black glass / Aluminium · Black glass	Air capacity IEC point	415	480	540	600	Rectangular ducting
Controls	Pressure	320	430	550	725	recycling kit
Touch control	Input	55	85	115	145	
Lighting	Noise level	62	64	67	70	
-						
Grease filter						
Cassettes dishwasher safe						

 $\frac{\text{Ø of air outlet}}{220 \times 90}$

Width

90 mm

90 111111

Energy class

A+



The hob also integrates the controls of the hood

HOO-B COOKTOP, THE NEXT-GENERATION FITTED HOOD

A sophisticated yet minimalist look for the new fitted HOO-B hood, which is embellished with a special aluminium trim that makes it even more stylish. The glass panel fits over the hob without interrupting the continuity of its forms and lines, guaranteeing the utmost quality at all times. The Touch control commands also make it possible to operate the hood and induction hobs with the touch of a finger. When in use, HOO-B opens, lifting its cover and revealing its extraction surface. When you have finished using it, the cover goes back down to create a single worktop again. For those that love pure minimalism, the new model also comes in the HOO-B

Glass version with no aluminium trim.



Hoo-B must be combined to FCH32 C induction hobs




Remove the glass cover before using the hood




The Hoo-B hood attracts all cooking streams ensuring the maximum result of extraction completely built-in the kitchen top.

Installation Diagram

ноо-в




HOO-B + 1 FABER INDUCTION HOB FCH32 C




HOO-B + 2 FABER INDUCTION HOBS FCH32 C


HOO-B GLASS




HOO-B GLASS + 1 FABER INDUCTION HOB FCH32 FLUSH FIT INSTALLATION



HOO-B + 2 FABER INDUCTION HOBS FCH32 FLUSH FIT INSTALLATION



Air outlet adjustable on the right side or left side



Air outlet adjustable on the right side or left side

WALL

Using only the finest materials, our wall hoods have been designed to be an attractive addition to your kitchen. They conceal a powerful motor and refined aspiration systems to guarantee clean air and silence.







CHLOÈ

CHLOÈ EV8+ OM A70 cod. 110.0456.129 CHLOÈ EV8+ OC A70 cod. 110.0456.174 **CHLOÈ EV8+ CI A70** cod. 110.0456.175

CHLOÈ EV8+ OB A70 cod. 110.0456.177 CHLOÈ EV8+ DG MATT A70 cod. 110.0458.989 **CHLOÈ EV8+ CG MATT A70** cod. 110.0459.033























You can control your hood directly from the hob thanks to clever technology built into the induction zone



Old copper - OC



Cast iron - CI




Old brass - OB



Dark grey matt - DG MATT




Country grey matt - CG MATT





Rear air outlet kit (optional)



FEATURES	PERFORMANCES		ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0157.240	Cod. 112.0490.261
· Old metal · Old copper · Cast iron	Air capacity IEC point	300420 590 700	F8 Charcoal filter	Rear air outlet kit
· Old brass			Cod. 112.0157.354	Cod. 112.0490.262
· Dark grey matt	Pressure	440 500 540 550	Remote control	Cod. 112.0490.262
· Country grey matt	Input	190 230 255 270	remote control	Rear air outlet kit
Controls	<u>.</u>		Cod. 112.0158.127	ОВ
Electronic Led	Noise level	51 59 66 69	FHP8 Charcoal filter High	Cod. 112.0490.263
Lighting			Performance	Rear air outlet kit DG MATT
LED light			Cod. 112.0185.278	
Grease filter			FLL8 Charcoal filter	Cod. 112.0490.264
Cassettes dishwasher safe			Long Lasting	Rear air outlet kit CG MATT
Ø of air outlet			Cod. 112.0490.249	
150 /120 mm			Rear air outlet kit OM	
Width			Cod. 112.0490.250	
700 mm				
Energy class			Rear air outlet kit OC	
A				





VEIL WH MATT A90 cod. 110.0324.952 **VEIL WH A90** cod. 110.0324.953 **VEIL BK A90** cod. 110.0324.954









(optional)

Limited Edition

VEIL CONCRETE cod. 110.0393.869 VEIL TIBETAN SILVER cod. 110.0393.872 VEIL SILVER LEAF cod. 110.0393.837





White chimney finish: stainless steel



Concrete chimney finish: white matt

Limited Edition



Black matt chimney finish: stainless steel




Tibetan silver chimney finish: white matt

Limited Edition



Silver leaf chimney finish: white matt

Limited Edition



FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.240
· White matt · White · Black matt	Air capacity IEC point	300410 570 700	F8 Charcoal filter
·Concrete	Pressure	420 490 530 550	Cod. 112.0327.007
· Tibetan silver · Silver leaf	Input	190 230 255 270	ENERGY Remote blower kit
Controls	Noise level	50 58 65 69	Cod. 112.0158.127
Electronic			FHP8 Charcoal
Lighting			filter High Performance
2 LED lights			renomiance
Grease filter			Cod. 112.0185.278
Cassettes dishwasher safe			FLL8 Charcoal filte Long Lasting
Ø of air outlet			
150 / 120 mm			

900 mm

A+

Energy class





THALIA

THALIA WH MATT F60 cod 110.0324.923 **THALIA GREEN F60** cod. 110.0324.924 **THALIA PINK F60** cod. 110.0324.925

THALIA CREAM F60 cod. 110.0324.926 **THALIA BK MATT F60** cod. 110.0437.124























White matt



Cameo pink








Black matt



Thalia with chimney



Air outlet adjustable on the rear side


FEATURES	PERFORMANCES	i	ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0157.354	Cod. 112.0327.007
· White matt · Sage green	Air capacity IEC point	280 420 560 650	Remote control	ENERGY Remote blower kit
· Cameo pink · Cream white · Black matt	Pressure	420 500 550 580	Cod. 112.0327.633	Cod. 112.0158.127
Controls	Input	190 230 255 270	Chimney kit Wh matt	FHP8 Charcoal
EVO feel touch	Noise level	49 59 66 69	Cod. 112.0329.929	filter High Perfor- mance
Lighting			Chimney kit Green	Cod. 112.0185.278
Perimetral LED light			Cod. 112.0329.961	FLL8 Charcoal filter
Grease filter			Chimney kit Pink	20119 20011119
Cassettes dishwasher safe			•	
Ø of air outlet			Cod. 112.0329.962	
150 / 120			Chimney kit Cream	
,			Cod. 112.0437.743	
Width				
600 mm			Chimney kit Bk matt	
Energy class				
В				







Black



LITHOS

LITHOS EG6 BK A45 cod. 110.0255.510 LITHOS EG6 WH MATT A45 cod. 110.0255.511 LITHOS EG6 WH A45 cod. 110.0255.513

Limited Edition

LITHOS CONCRETE A45 cod. 110.0393.916





LED versions will be available starting from May 2018

FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.240
· Black matt · White matt · White	Air capacity IEC point	285 440 535 585	F8 Charcoal filter
· Concrete	Pressure	200 280 300 320	Cod. 112.0158.127
Controls	Input	90 105 125 140	FHP8 Charcoal filter High
Electronic	Noise level	54 62 67 69	Performance
Lighting	Noise level	34 02 07 09	Cod. 112.0185.278
Spotlights 2x20 W 2 LED lights (concrete version)			FLL8 Charcoal filter Long Lasting
Grease filter			
Cassettes dishwasher safe			
Ø of air outlet			
150 / 120 mm			
Width			
450 mm			
Energy class			
D (concrete version)			



Concrete
Limited Edition





CYLINDRA GLOSS PLUS

 $\textbf{CYLINDRA GLOSS PLUS EV8+ WH A37} \ cod.\ 335.0492.565 \\$



Energy class
















(optional)



FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.243
·White	Air capacity IEC point	280 420 580 680	F9 Charcoal filter
Controls			Cod. 112.0157.354
Electronic Led	Pressure	430 500 530 545	
Lighting	Input	190 230 255 270	Remote control
Micro LED Lights	Noise level	56 62 68 71	Cod. 112.0327.007
Grease filter			ENERGY Remote blower kit
Cassettes dishwasher safe			
Ø of air outlet			Cod. 112.0185.276
150 / 120 mm			FLL9 Charcoal filter Long Lasting
Width			
370 mm			






To be installed at a minimum distance from the hob of 55 cm.

Air outlet adjustable on the rear side



CYLINDRA

CYLINDRA EV8 X A37 cod. 110.0332.307



To be installed at a minimum distance from the hob of **55 cm**.

Air outlet adjustable on the rear side















(op

FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.243
· Stainless steel	Air capacity		F9 Charcoal filter
Controls	IEC point	300 460 600 660	
Electronic Led	Pressure	330 420 470 500	Cod. 112.0157.354
Lighting	Input	145 180 230 250	Remote control
2 LED lights	Noise level	52 60 67 70	Cod. 112.0327.007
Grease filter			ENERGY Remote blower kit
Cassettes dishwasher safe			
Ø of air outlet			Cod. 112.0185.276
150 / 120 mm			FLL9 Charcoal filter Long Lasting
Width			
370 mm			
Energy class			
<u> </u>			

NAUTILUS Lower energy consumption. Higher efficiency.



NAUTILUS BRINGS YOU THE FIRST EVER ULTRA-THIN, TRULY VERTICAL HOOD. The revolutionary Nautilus motor is ultra slim at only 15cm wide. Reducing the space for the motor has eliminated the conventional slanted surface usually seen on a wall mounted hood.





NATURALLY INNOVATIVE

The motor design for this innovative diffuser is closely based on the cross-section of a nautilus shell.

Thanks to its advanced fluid dynamics and optimised shape, the Nautilus diffuser ensures an unobstructed air flow.


And despite a depth of only 15 cm, the Nautilus is incredibly efficient.

ACHIEVING EXCELLENCE IN ENERGY

The Nautilus diffuser combines superb performance with minimal energy consumption allowing the hoods to take a giant leap from an energy class C to class A.





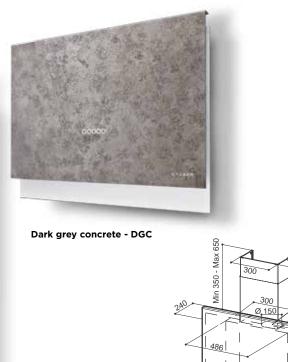

To be installed at a minimum distance from the hob of **50 cm**.

TALÌKA

TALIKA OC A80 cod. 110.0456.271 **TALIKA CT A80** cod. 110.0456.272 **TALIKA DGC A80** cod. 110.0456.273













(optional)

Chimney finish: RAL Design 000 85 00



FEATURES	PERFORMANCES	ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0157.242
· Old copper · Cross titanium	Air capacity IEC point	260 385 445 530	F4 Charcoal filter
· Dark grey concrete Controls	Pressure	280 350 470 570	Cod. 112.0157.354
Squarcle touch	Input	80 95 110 125	Remote control
Lighting	Noise level	55 64 68 69	
LED lights			
Grease filter			
Cassettes dishwasher safe			
Ø of air outlet			
150 / 120 mm			
Width			
800 mm			
Energy class			
A			



Cross titanium - CT

TALÌKA: THE FIRST ULTRASLIM VERTICAL EXTRACTOR HOOD POWERED BY NAUTILUS.

Its innovative design makes it a true "window over the cooker": special Nautilus technology completely eliminates the conventional slanted surface, making it possible to create the first truly vertical hood.









White/Warm Grey - WH/WG

GLAM-LIGHT

GLAM-LIGHT EV8+ WH/WG A80 cod. 110.0456.116 **GLAM-LIGHT EV8+ DG/LG A80** cod. 110.0456.119 **GLAM-LIGHT EV8+ PINK/WH A80** cod. 110.0456.141 **GLAM-LIGHT EV8+ AL/WG A80** cod. 110.0456.142 GLAM-LIGHT EV8+ WH/T A80 cod. 110.0456.143











Dark Grey/Light Grey - DG/LG




Pink/White - PNK/WH




Almond/Warm Grey - AL/WG



White/Transparent - WH/T

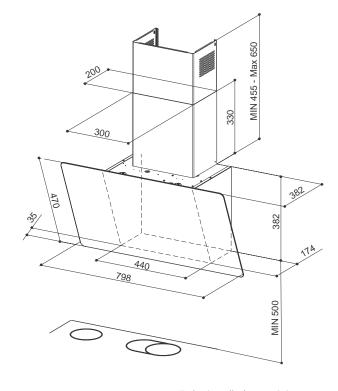





FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.240
· White glass / Warm Grey - WH/WG · Dark Grey glass / Light Grey - DG/LG · Pink glass / White - PNK/WH	Air capacity IEC point	310 420 580 720	F8 Charcoal filter
· Almond glass / Warm Grey - AL/WG · White glass / Transparent - WH/T	Pressure	440 500 540 550	Cod. 112.0252.439
Controls	Input	175 220 255 270	Recycling version kit WH
Touch control	Noise level	52 56 62 65	Cod. 112.0252.442
Lighting	_		Recycling version
LED lights			kit BK
Grease filter			Cod. 112.0158.127
Cassettes dishwasher safe	-		FHP8 Charcoal filter High
Ø of air outlet	_		Performance
150 / 120 mm			Cod. 112.0185.278
Width			FLL8 Charcoal filter
800 mm			Long Lasting
Energy class			
A+	_		





INFINITY WH A80 cod. 110.0324.930 **INFINITY BK A80** cod. 110.0324.932

To be installed at a minimum distance from the hob of **50 cm**.























Chimney Recycling Kit WH



(optional)

FEATURES	PERFORMANCES		ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0157.240	Cod. 133.0272.534
· White glass · Black glass	Air capacity IEC point	300420 590 720	F8 Charcoal filter	Chimney Recycling Kit BK
Controls	Pressure	410 490 510 550	Cod. 112.0157.354	Cod. 133.0195.967
EVO touch control			Remote control	
Lighting	Input	190 230 255 270	Cod. 112.0327.007	Chimney Recycling Kit S-Steel
LED lights	Noise level	52 60 67 71	ENERGY Remote	Cod. 133.0046.956
Grease filter			blower kit	Kit Filtering
Cassettes dishwasher safe			Cod. 112.0252.439	Connect+Wall Spacer A08
Ø of air outlet			Recycling version	Cod. 112.0158.127
150 / 120 mm			Cod. 112.0252.442	EHP8 Charcoal filter
Width				High Performance
800 mm			Recycling version kit BK	Cod. 112.0185.278
Energy class			Cod. 112.0327.632	FLL8 Charcoal filter
A			Recycling Version Kit S-Steel	Long Lasting
			Cod. 133.0301.599	

To be installed at a minimum distance from the hob of **50 cm**.



JOLIE

JOLIE WH A80 cod. 110.0324.936 JOLIE BK A80 cod. 110.0324.937 JOLIE ALMOND A80 cod. 110.0324.938











(optional)

FEATURES	PERFORMANCES		ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0157.240	Cod. 133.0272.534
· White glass · Black glass · Almond glass	Air capacity IEC point	280 400 480 520	F8 Charcoal filter	Chimney Recycling Kit BK
Controls	Pressure	190 265 280 290	Cod. 112.0327.007	Cod. 133.0195.967
Electronic backlight	Input	90 105 125 140	ENERGY Remote blower kit	Chimney Recycling
Lighting	Noise level	57 63 68 69	Cod. 112.0252.439	Kit S-Steel
2 LED lights			Recycling version	Cod. 133.0046.956
Grease filter			kit WH	Kit Filtering Connect+Wall
Cassettes dishwasher safe			Cod. 112.0252.442	Spacer A08
Ø of air outlet			Recycling version	Cod. 112.0158.127
150 / 120 mm				FHP8 Charcoal
Width			Cod. 112.0327.632	filter High Performance
800 mm			Recycling Version Kit S-Steel	Cod. 112.0185.278
Energy class			Cod. 133.0301.599	FLL8 Charcoal filter
С			Chimney Recycling Kit WH	5 5



BLACK TIE

BLACK TIE BRS WH A80 cod. 110.0256.169 **BLACK TIE BRS BK A80** cod. 110.0256.170

To be installed at a minimum distance from the hob of **50 cm**.

Air outlet adjustable on the rear side






















Chimney Recycling Kit BK



FEATURES	PERFORMANCES		ACCESSORIES	
Finish	Speed	1 2 3 4 INT	Cod. 112.0157.240	Cod. 133.0195.967
· White glass · Black glass	Air capacity IEC point	200 390 500 620 700	F8 Charcoal filter	Chimney Recycling Kit S-Steel
Controls	Pressure	200 280 390 460 560	Cod. 112.0157.354	Cod. 133.0046.956
Touch control			Remote control	
Lighting	Input Noise level	10 30 55 95 270 43 57 62 67 69	Cod. 112.0252.439	Kit Filtering Connect+Wall Spacer A08
2 LED lights Grease filter			Recycling version kit WH	Cod. 112.0158.127
Cassettes dishwasher safe			Cod. 112.0252.442	FHP8 Charcoal filter High
Ø of air outlet			Recycling version	Performance
150 / 120			kit BK	Cod. 112.0185.278
Width			Cod. 112.0327.632	FLL8 Charcoal filter
800 mm			Recycling Version Kit S-Steel	Long Lasting
Energy class			Cod. 133.0301.599	
A+			Chimney Recycling Kit WH	
			Cod. 133.0272.534	







To be installed at a minimum distance from the hob of **50 cm**.

NORTHIA

NORTHIA EV8 BK/X A90 cod. 110.0334.104 NORTHIA EV8 W/X A90 cod. 110.0334.106 NORTHIA EV8 BK/X A60 cod. 110.0334.103 NORTHIA EV8 W/X A60 cod. 110.0334.105

















FEATURES	PERFORMANCES		ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0157.240	Cod. 133.0272.534
· Black glass / Stainless steel · White glass / Stainless steel	Air capacity IEC point	300410 580 720	F8 Charcoal filter	Chimney Recycling Kit BK
Controls	Pressure	430 490 530 560	Cod. 112.0327.007	Cod. 133.0195.967
Touch control	Pressure	430 490 530 560	ENERGY Remote	
Lighting	Input	190 230 255 270	blower kit	Chimney Recycling Kit S-Steel
2 LED Lights	Noise level	52 59 66 70	Cod. 112.0252.439	Cod. 133.0046.956
Grease filter			Recycling version kit WH	Kit Filtering
Cassettes dishwasher safe			Cod. 112.0252.442	Connect+Wall Spacer A08
Ø of air outlet			Recycling version	Cod. 112.0158.127
150 / 120 mm			kit BK	FUDO Chamaral
Width			Cod. 112.0327.632 FHP8 Charco filter High Performance	
600 / 900 mm			Recycling Version	
Energy alone			Kit S-Steel	Cod. 112.0185.278
Energy class A+			Cod. 133.0301.599	FLL8 Charcoal filte
			Chimney Recycling Kit WH	Long Lasting





COCKTAIL EV8 BK A80 cod. 110.0252.427 COCKTAIL EV8 WH A80 cod. 110.0252.428 COCKTAIL EV8 ALMOND A80 cod. 110.0364.606
















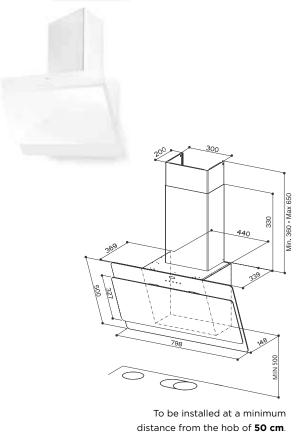

FEATURES	PERFORMANCES		ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0157.240	Cod. 133.0195.967
· Black glass · White glass · Almond glass	Air capacity IEC point	310 480 630 720	F8 Charcoal filter	Chimney Recycling Kit S-Steel
Controls	Pressure	350 450 480 520	Cod. 112.0252.439	Cod. 133.0046.956
Touch control		145 100 070 050	Recycling version	IZE File-sis-s
Touch control	Input	145 180 230 250	kit WH	Kit Filtering Connect+Wall
Lighting	Noise level	52 62 67 70	Cod. 112.0252.442	Spacer A08
2 LED lights			Recycling version	Cod. 112.0158.127
Grease filter			kit BK	FHP8 Charcoal
Cassettes dishwasher safe			Cod. 112.0327.632	filter High Performance
Ø of air outlet			Recycling Version	
150 / 120 mm			Kit S-Steel	Cod. 112.0185.278
Width			Cod. 133.0301.599	FLL8 Charcoal filter Long Lasting
800 mm			Chimney Recycling Kit WH	Long Lasting
Energy class			Cod. 133.0272.534	
С			Chimney Recycling Kit BK	



COCKTAIL XS

COCKTAIL XS EV8 BK A55 cod. 110.0256.810 COCKTAIL XS EV8 WH A55 cod. 110.0256.821 COCKTAIL XS EV8 ALMOND A55 cod. 110.0364.607



















To be installed at a minimum distance from the hob of **50 cm**.

FEATURES	PERFORMANCES	; 	ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.240
· Black glass · White glass · Almond glass	Air capacity IEC point	285 415 500 535	F8 Charcoal filter
Controls	Pressure	190 265 280 290	Cod. 112.0252.442
Touch control	Input	90 105 125 140	Recycling version kit BK
Lighting	Noise level	56 62 66 68	Cod. 112.0327.632
2 LED lights			Recycling Version
Grease filter			Kit S-Steel
Cassettes dishwasher safe			Cod. 133.0046.956
Ø of air outlet			Kit Filtering Connect+Wall
150 / 120 mm			Spacer A08
Width			Cod. 112.0158.127
550 mm			FHP8 Charcoal filter High
Energy class			Performance
В			Cod. 112.0185.278
			FLL8 Charcoal filter Long Lasting





To be installed at a minimum distance from the hob of **50 cm**.

VANITY

VANITY EG6 BK A80 cod. 110.0371.518 **VANITY EG6 WH A80** cod. 110.0371.519










(---ti---1)

FEATURES	PERFORMANCES		ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0327.007	Cod. 112.0158.127
· Black glass · White glass	Air capacity IEC point	290 430 510 550	ENERGY Remote blower kit	FHP8 Charcoal filter High Performance
Controls	Pressure	215 280 300 320	Cod. 112.0157.240	renormance
Touch control		90 105 125 140		Cod. 112.0185.278
Lighting	Input	90 105 125 140	F8 Charcoal filter	FLL8 Charcoal
2 LED lights	Noise level	56 63 68 70	Cod. 112.0252.439	filter Long Lasting
Grease filter			Recycling version kit WH	
Cassettes dishwasher safe			Cod. 112.0252.442	
Ø of air outlet				
150 / 120 mm			Recycling version kit BK	
Width			Cod. 133.0046.956	
800 mm			Kit Filtering Connect+Wall	
Energy class			Spacer A08	
C				









To be installed at a minimum distance from the hob of **50 cm**.

CITY

CITY EG6 BK/X A80 cod. 110.0322.124 CITY EG6 W/X A80 cod. 110.0322.126 CITY EG6 X A80 cod. 110.0322.125 **CITY EG6 BK/X A60** cod. 110.0322.128 **CITY EG6 W/X A60** cod. 110.0322.129












LED versions will be available starting from May 2018

The City is not recommended for use over an induction hob

FEATURES	PERFORMANCES			ACCESSORIES	
Finish	Speed	1 2 3	INT	Cod. 112.0157.240	Cod. 133.0272.534
· Stainless steel / Black glass · Stainless steel / White glass · Stainless steel	Air capacity IEC point	240 360 465	540	F8 Charcoal filter	Chimney Recycling Kit BK
Controls	Pressure	190 265 280 2	290	Cod. 112.0327.007	Cod. 133.0195.967
Electronic	Input	90 105 125	140	ENERGY Remote blower kit	Chimney Recycling Kit S-Steel
Lighting	Noise level	49 58 64 (67	Cod. 112.0252.439	Cod. 133.0046.956
Spotlights 2x20 W				Recycling version	
Grease filter				kit WH Cod. 112.0252.442	Kit Filtering Connect+Wall Spacer A08
Cassettes dishwasher safe					
Ø of air outlet				Recycling version	Cod. 112.0158.127
150 / 120 mm				kit BK	FHP8 Charcoal filter
Width				Cod. 112.0327.632	High Performance
600 / 800 mm				Recycling Version	Cod. 112.0185.278
•				Kit S-Steel	FLL8 Charcoal filter
Energy class				Cod. 133.0301.599	Long Lasting
D				Chimney Recycling Kit WH	







To be installed at a minimum distance from the hob of ${\bf 50}~{\bf cm}$.

DAISY DAISY B

DAISY EG6 LED BK A80 cod. 330.0529.562
DAISY EG6 LED WH A80 cod. 330.0529.564
DAISY EG6 LED BK A55 cod. 330.0529.561
DAISY EG6 LED WH A55 cod. 330.0529.563







(optional)

DAISY B EG6 BK A80 cod. 330.0529.063
DAISY B EG6 WH A80 cod. 330.0529.061
DAISY B EG6 BK A55 cod. 330.0529.064
DAISY B EG6 WH A55 cod. 330.0529.065

AIR OUTLET ADJUSTABLE ON THE REAR SIDE Available starting from May 2018

FEATURES	PERFORMANCES		ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0157.240	Cod. 133.0046.956
· Black glass · White glass	Air capacity IEC point	290 430 510 550	F8 Charcoal filter	Kit Filtering Connect+Wall Space
Controls	Pressure	215 280 300 320	Cod. 112.0327.007	A08
Touch control	Input	90 105 125 140	ENERGY Remote blower kit	Cod. 112.0158.127
Lighting	Noise level	56 63 68 70	Cod. 112.0252.439	FHP8 Charcoal filter High Performance
2 LED lights	Moise level	30 03 00 70		riigii Ferioriilarice
Grease filter			Recycling version kit WH	Cod. 112.0185.278
Cassettes dishwasher safe			Cod. 112.0252.442	FLL8 Charcoal filter Long Lasting
Ø of air outlet			Recycling version	
150 / 120 mm			kit BK	
Width			Cod. 112.0327.632	
550 / 800 mm			Recycling Version Kit S-Steel	
Energy class				
C				

STEAM OFF SYSTEM Banish steam from your kitchen. Watch the humidity disappear.




A DOUBLY SMART WAY TO ELIMINATE CONDENSATION - TOTALLY. YOUR KITCHEN WILL THANK YOU.

The SOS system injects accurately controlled, helical and variable geometry air jets into the hood. These jets create a vortex that accelerates the air upwards, increasing flow rate and the hood's ability to capture cooking fumes and steam. The result? No more condensation or grease under and inside the hood!

EXCLUSIVE COMFORT BY FABER

Induction hobs create a large temperature differential between the hot cooking surface and the colder air under the range hood. In the past, this always led to problems of condensation, but now Faber has the answer. If extraction leaves annoying drops of condensation under your hood, solve the problem with SOS!



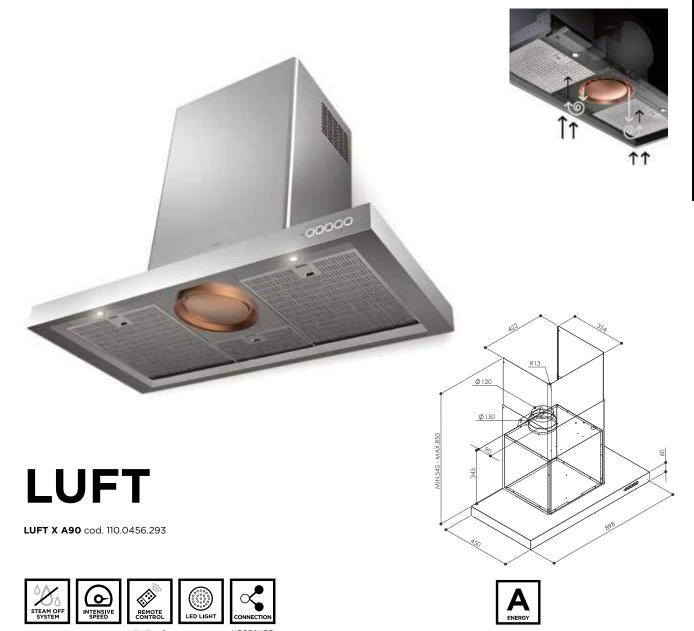

You can control your hood directly from the hob thanks to clever technology built into the induction zone

FEATURES	PERFORMANCES	ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0459.452
· Stainless steel	Air capacity IEC point	292 420 565 720	F16 Charcoal filter
Controls			Cod. 112.0157.354
Squarcle touch	Pressure	420 470 490 510	
Lighting	Input	171 206 248 275	Remote control
LED lights	Noise level	47 57 56 66	
Grease filter			
Stainless steel cassettes dishwasher safe			
Ø of air outlet			
150 mm			
Width			
900 mm			
Energy class			
A			



T-LIGHT EV8+ X A90 cod. 110.0456.267 **T-LIGHT EV8+ X A120** cod. 110.0456.268 **T-LIGHT EV8+ WH MATT A90** cod. 110.0456.269 **T-LIGHT EV8+ WH MATT A120** cod. 110.0456.270















You can control your hood directly from the hob thanks to clever technology built into the induction zone

FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.243
· Stainless steel · White matt	Air capacity IEC point	290 420 580 690	F9 Charcoal filter
Controls	Pressure	410 470 520 530	Cod. 112.0157.354
Squarcle touch	Input	190 230 255 270	Remote control
Lighting	Noise level	FO FO CF CO	Cod. 112.0185.276
Perimeter LED light	Noise level	50 58 65 68	FLL9 Charcoal filter
Grease filter			Long Lasting
Cassettes dishwasher safe			
Ø of air outlet			
150 / 120 mm			
Width			
900 / 1200 mm			
Energy class			
A			













KIT (optional)

(optional)

FEATURES	PERFORMANCES		ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0157.243	Cod. 112.0327.007
· Stainless steel	Air capacity IEC point	300 460 620 700	F9 Charcoal filter	ENERGY Remote
Controls			Cod. 112.0157.270	blower kit
Electronic	Pressure	330 430 490 500		Cod. 112.0327.631
Lighting	Input	145 180 230 250	Splashback X 600 mm	HFH Filter kit
2 LED lights (600-900 mm) 3 LED lights (1200 mm)	Noise level	52 62 69 71	Cod. 112.0157.271	Cod. 112.0185.276
Grease filter			Splashback X 900 mm	FLL9 Charcoal filter
Cassettes dishwasher safe			300 11111	Long Lasting
Ø of air outlet			Cod. 112.0157.272	
150 / 120 mm			Splashback X 1200 mm	
Width			Cod. 112.0157.252	
600 / 900 / 1200 mm				
Energy class			Upper chimmeny kit X	

85 / FABER

INTEGRATED HOODS

Discreet, rational, silent.
Built-in hoods reduce the aesthetic impact of the hood in the kitchen and integrate perfectly with the cupboards.
An essential tool that's invisible to the eye.















(optional)





You can control your hood directly from the hob thanks to clever technology built into the induction zone

FEATURES	PERFORMANCES	i	ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0459.452
· Stainless steel	Air capacity IEC point	280 420 580 710	F16 Charcoal filter
Controls			Cod. 112.0157.354
Squarcle touch	Pressure	430 500 530 550	
Lighting	Input	200220260280	Remote control
LED lights	Noise level	50 58 65 69	
Grease filter			
Stainless steel cassettes dishwasher safe			
Ø of air outlet			
150 mm			
Width			
900 mm			
Energy class			
A			





IN-LIGHT EV8+ X A52 cod. 110.0456.213 IN-LIGHT EV8+ X A70 cod. 110.0456.215

IN-LIGHT EV8+ WH MATT A52 cod. 110.0456.216 **IN-LIGHT EV8+ WH MATT A70** cod. 110.0456.218






















You can control your hood directly from the hob thanks to clever technology built into the induction zone $\,$

FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.240
· Stainless steel · White matt	Air capacity IEC point	260 380 525 635	F8 Charcoal filter
Controls	Pressure	390 500 510 530	Cod. 112.0158.127
Electronic Led	Input	170 215 245 275	FHP8 Charcoal filter High
Lighting	Noise level	56 65 70 72	Performance
Perimeter LED light	Noise level	30 03 70 72	Cod. 112.0185.278
Grease filter			FLL8 Charcoal filter
Cassettes dishwasher safe			Long Lasting
Ø of air outlet			
150 / 120 mm			
Width			
520 / 700 mm			
Energy class			
A			

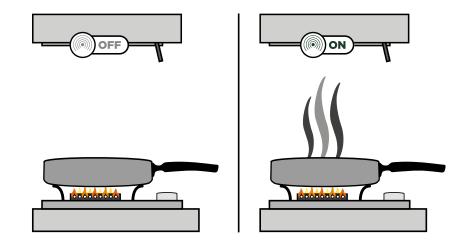

SELF - START Automatic hood control.



FORGET ABOUT THE HOOD, JUST ENJOY THE COOKING!

A SPECIAL SENSOR SWITCHES THE HOOD ON AS SOON AS AIR TEMPERATURE REACHES 35°C.

A smart sensor activates your hood automatically whenever needed. Faber loves to make cooking easier and more enjoyable!

Class A energy efficiency, super-effective perimeter extraction plus an easy-to-clean panel to keep your kitchen looking great.

A TALENT FOR DESIGN TOO.

Only Faber offers you designer hood technology in a traditional canopy model.



IN-NOVA PREMIUM

To be installed at a minimum distance from the hob of **53 cm**.

IN-NOVA PREMIUM EV8+ X A60 cod. 110.0439.940
IN-NOVA PREMIUM EV8+ X A90 cod. 110.0439.951
IN-NOVA PREMIUM EV8+ X A120 cod. 110.0439.952






















You can control your hood directly from the hob thanks to clever technology built into the induction zone $\frac{1}{2}$

FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.243
· Stainless steel	Air capacity IEC point	280 420 570 670	F9 Charcoal filter
Controls			Cod. 112.0157.354
Electronic SENSOR	Pressure	420 465 510 520	
Lighting	Input	175 220 255 270	Remote control
2 LED lights	Noise level	53 62 68 70	Cod. 112.0327.007
Grease filter			ENERGY Remote blower kit
Cassettes dishwasher safe			Cod. 112.0185.276
Ø of air outlet			
150 / 120 mm			FLL9 Charcoal filter Long Lasting
Width			
600 / 900 / 1200 mm			
Energy class			
A			

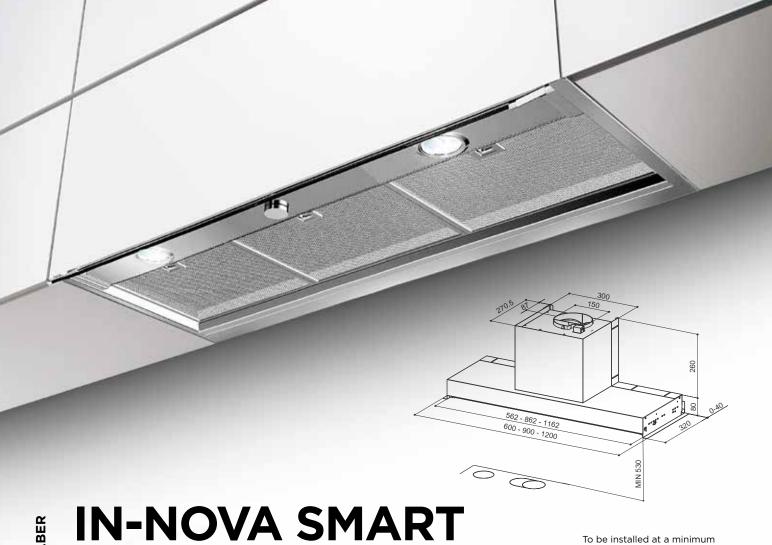

IN-NOVA SMART X A60 110.0395.198 IN-NOVA SMART X A90 110.0395.382

IN-NOVA SMART X A120 110.0395.476

To be installed at a minimum distance from the hob of **53 cm**.



FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3	Cod. 112.0067.944
· Stainless steel	Air capacity IEC point	220 325 390	F3 Charcoal filter
Controls			
Pull out Knob	Pressure	160 190 200	-
Lighting	Input	85 110 145	
2 LED lights	Noise level	55 64 69	•
Grease filter			
Stainless steel cassettes dishwasher safe			
Ø of air outlet			
150 / 120 mm			
Width			
600 / 900 / 1200 mm			
Energy class			
D			





VICTORY 2.0 X A54 cod. 110.0357.399 VICTORY 2.0 X A77 cod. 110.0357.395 VICTORY 2.0 X A99 cod. 110.0357.341

Air outlet adjustable in 4 positions



















FEATURES	PERFORMANCES					ACCESSORIES
Finish	Speed	1	2	3	INT	Cod. 112.0157.243
· Stainless steel	Air capacity IEC point	230	35() 485	5 585	F9 Charcoal filter
Controls				- 100		Cod. 112.0327.007
Electronic Led	Pressure	360	450	480	500	
Lighting	Input	135	170	215	250	ENERGY Remote blower kit
2 LED Lights (540-770 mm)	Noise level	50	61	67	70	Cod. 112.0185.276
4 LED Lights (990 mm)	Noise level	50	Oi	07	70	COG. 112.0185.276
Grease filter						FLL9 Charcoal filter Long Lasting
Cassettes dishwasher safe						
Ø of air outlet						
150 / 120 mm						
Width						

540 / 770 / 990 mm

Energy class



INCA LUX EV8 X/WH A52 cod. 110.0356.481 INCA LUX EV8 X/BK A52 cod. 110.0356.519 INCA LUX EV8 X/WH A70 cod. 110.0356.541 INCA LUX EV8 X/BK A70 cod. 110.0356.558



Energy class
B (700 mm)
C (520 mm)













optional)

NOT COMPATIBLE WITH REMOTE CONTROL

	520 mm		700 mm		
FEATURES	PERFORMANCES		PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Speed	1 2 3 INT	Cod. 112.0157.240
· Stainless steel / White glass · Stainless steel / Black glass	Air capacity IEC point	300460590660	Air capacity IEC point	315 480 630 710	F8 Charcoal filter
Controls	Pressure	350 440 480 510	Pressure	340 450 480 510	Cod. 112.0327.007
Electronic	Input	145 180 230 250	Input	145 180 230 250	ENERGY Remote blower kit
Lighting	Noise level	54 65 69 71	Noise level	52 62 68 70	
2 LED lights	110130 10101	31 03 03 71	110.50 1010.	32 02 00 70	Cod. 112.0158.127
Grease filter					FHP8 Charcoal filter High Performance
Cassettes dishwasher safe					renormance
Ø of air outlet					Cod. 112.0185.278
150 / 120 mm					FLL8 Charcoal filter Long Lasting
Width					
520 / 700 mm					



INCA LUX 2.0 EV8 X A52 cod. 110.0327.652 INCA LUX 2.0 EV8 X A70 cod. 110.0327.653

To be installed at a minimum distance from the hob of **53 cm**.



C (520 mm)















ional)

You can control your hood directly from the hob thanks to clever technology built into the induction zone

	520 mm		700 mm		
FEATURES	PERFORMANCES		PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Speed	1 2 3 INT	Cod. 112.0157.240
Stainless steel	Air capacity IEC point	300 460 590 660	Air capacity IEC point	315 480 630 710	F8 Charcoal filter
Controls Electronic Led	 Pressure	350 440 480 510	Pressure	340 450 480 510	Cod. 112.0157.354
Lighting	Input	145 180 230 250	Input	145 180 230 250	Remote control
2 LED lights	Noise level	54 65 69 71	Noise level	52 62 68 70	Cod. 112.0327.007
Grease filter					ENERGY Remote blower kit
Cassettes dishwasher safe					Cod. 112.0158.127
Ø of air outlet 150 / 120 mm					FHP8 Charcoal filter High Performance
Width					Cod 112 0105 270
520 / 700 mm					FLL8 Charcoal filter
Energy class					Long Lasting
B (700 mm)					



MAXIMA EG8 AM/X A60 cod. 110.0184.818 MAXIMA EG8 AM/X A90 cod. 110.0184.820





LED versions will be available starting from May 2018

FEATURES	PERFORMANCES	ACCESSORIES	
Finish	Speed	1 2 3	Cod. 112.0157.240
· Metal aluminium / Stainless steel handle	Air capacity IEC point	310 490 640	F8 Charcoal filter
Controls		010 130 0 10	Cod. 112.0327.007
Electromechanical	Pressure	340 450 490	-
Lighting	Input	145 180 250	 ENERGY Remote blower kit
Spotlights 2x20 W	Noise level	51 61 67	Cod. 112.0158.127
Grease filter			FHP8 Charcoal
Cassettes dishwasher safe			filter High Performance
Ø of air outlet			Cod. 112.0185.278
150 / 120 mm			FLL8 Charcoal filter
Width			Long Lasting
600 / 900 mm			
Energy class			
<u> </u>			

INDUCTION HOBS



FCH32 - to combine with Hoo-B Glass


FCH32

FCH32 cod. 108.0456.298 FCH32 C cod. 108.0456.297



Frequency (HZ) 50/60





FEATURES	PERFORMANCES	
Product dimensions LxW (mm)	Power setting (stages)	9
290X520		
Recess dimensions LxW (mm)	Timer min-max	1-99 min
270x500	Booster (P)	Yes
Induction zone	Auto switch off	Yes
2		103
Controls	Over temperature protection	Yes
Touch control		
Min-max pan size (mm)	Over current or voltage abnormality protection	Yes
110-225	Container detection system	Yes
Power (W)	Automatic shutdown protection	Yes
3700		
Voltage (V)	Power On indicator	Yes
230V		



FCH32 C - to combine with Hoo-B $\,$

CONNECTION Dialogue between hood and hob.



HOOD&HOB

THE FIRST FAMILY OF APPLIANCES THAT TALK TO EACH OTHER.

A CHOICE OF 3 INDUCTION HOBS, FULLY COMPATIBLE WITH 40 HOOD MODELS.

Creating a hob and hood that talk to each other is another first from Faber. Now you can control your hood directly from the hob, thanks to clever technology built into the induction zone.


OUR MISSION IS TO MAKE LIFE IN THE KITCHEN MORE ENJOYABLE.

FCH32: great performance from 2 induction zones making it ideal for compact kitchens.

FCH64: a great hob with 4 different size induction zones.

FCH93: 90 cm wide, with 3 induction zones for easy pan movement in larger kitchens.







FCH64

FCH64 cod. 108.0456.299



Frequency (HZ) 50/60





HOOD&HOE

PERFORMANCES	
Power setting (stages)	9
Timer min-max	1-99 min
Booster (P)	Sì Yes
Auto switch off	Sì Yes
Over temperature protection	Sì Yes
Over current or voltage abnormality protection	Sì Yes
Container detection system	Sì Yes
Automatic shutdown protection	Sì Yes
Power On indicator	Sì Yes

FEATURES	
Product dimensions LxW (mm)	
580X520	
Recess dimensions LxW (mm)	
560x490	
Induction zone	
4	_
Controls	
Touch control	
Min-max pan size (mm)	
110-225	
Power (W)	
7400	
Voltage (V)	
230V	





The hob also integrates the controls of the hood



FEATURES	PERFORMANCES	
Product dimensions LxW (mm)	Power setting (stages)	9
900x350		
Recess dimensions LxW (mm)	Timer min-max	1-99 min.
880x335	Booster (P)	Yes
Induction zone	Auto switch off	Yes
3		
Controls	Over temperature protection	Yes
Touch control	Over current or voltage abnormality protection	Yes
Min-max pan size (mm)		
110-265	Container detection system	Yes
Power (W)	Automatic shutdown protection	Yes
6700		
Voltage (V)	Power On indicator	Yes
230V		
Frequency (HZ)		

50/60

EXTERNAL MOTOR HOODS


The Faber Collection is now enhanced by a complete range of hoods with external motors in ceiling, downdraft, integrated, wall and island models.


Why choose a cooker hood with an External MOTOR:

- To eliminate the noise from the cooker hood within the home.
- Allows the motor to be located completely outside of the home.

MISTRAL Outdoor









EXTERNAL REMOTE MOTOR MISTRAL

FABER 110.0365.067 > EAN 7612981551513

S	Colour	Cream
CHARACTERISTI	Net weight	7 kg

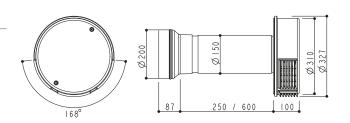

105 / FARFR

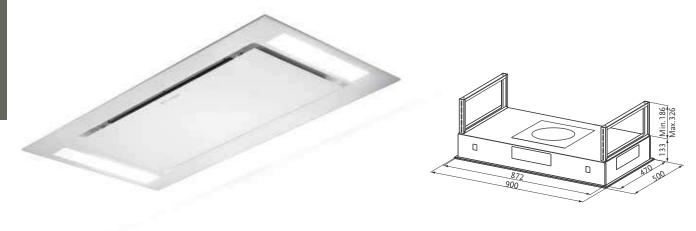

Lateral outlet of air

HEAVEN GLASS 2.0

HEAVEN GLASS 2.0 WH 90 RB cod. 110.0360.434


















FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	-
· White glass	Air capacity		
Controls	IEC point	280 380 440 520	
Electronic Led	Pressure	360 480 500 530	
Lighting	Input	100 135 140 145	
2 LED lights	Noise level	53 61 66 68	
Grease filter			
Cassettes dishwasher safe			
Ø of air outlet			
150 mm			
Width			
900 mm			
Energy class			
В			

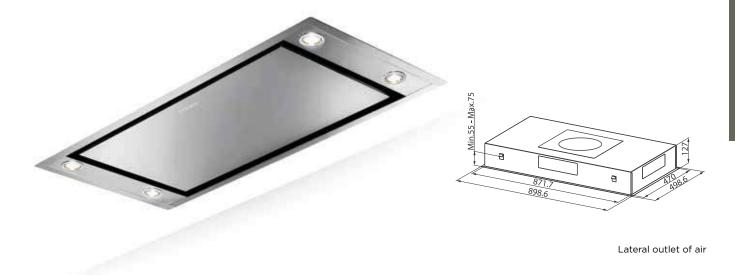

HEAVEN 2.0

HEAVEN 2.0 X 90 RB cod. 110.0360.483


















FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	-
· Stainless steel	Air capacity		
Controls	IEC point	280 380 440 520	
Electronic Led	Pressure	360 480 500 530	
Lighting	Input	100 135 140 145	
4 LED lights	Noise level	53 61 66 68	
Grease filter			
Cassettes dishwasher safe			
Ø of air outlet			
150 mm			
Width			
900 mm			
Energy class			
В			





X = 106 mm installation from below X = 113 mm installation from above

Lateral air outlet

FABULA

FABULA BK 90 RB cod. 110.0360.581




















FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 4 INT	Cod. 112.0157.354
·Stainless steel / Black glass	Air capacity		Remote control
Controls	IEC point	130 230 310 380 490	
EVO Touch control	Pressure	120 420 480 500 540	
Lighting	Input	45 85 105 125 145	
LED lights	Noise level	45 56 61 64 71	
Grease filter			
Cassettes dishwasher safe			
Ø of air outlet			
150 mm			
Width			
900 mm			
Energy class			
В			





To be installed at a minimum distance from the hob of **53 cm.**

STILNOVO LUX

STILNOVO LUX X 60 RB cod. 110.0360.516 **STILNOVO LUX X 90 RB** cod. 110.0365.261 **STILNOVO LUX X 120 RB** cod. 110.0365.268



















FEATURES	PERFORMANCES		ACCESSORIES	
Finish	Speed	1 2 3 INT	Cod. 112.0158.129	
· Stainless steel	Air capacity		Upper chimney kit	
Controls	IEC point	300380 450 530	H 602	
Electronic Led	Pressure	400 480 500 540	Cod. 112.0181.123	
Lighting	Input	100 135 140 145	Upper chimney kit	
2 LED lights	Noise level	54 58 62 67	H 275	
Grease filter			Cod. 112.0157.354	
Stainless steel cassettes dishwasher safe			Remote control	
Ø of air outlet				
150 mm				
Width				
600 / 900 / 1200 mm				
Energy class				
В				

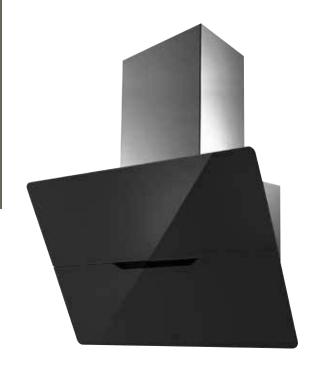





To be installed at a minimum distance from the hob of **50 cm**.

JOLIE

JOLIE BK 80 RB cod. 110.0360.616 **JOLIE WH 80 RB** cod. 110.0360.587
















FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0250.289
· White glass · Black glass	Air capacity IEC point	280 370 440 530	Chimney kit A500+A500 X
Controls	Pressure	370 480 500 540	Cod. 112.0157.354
Electronic Led	riessuie 		
	Input	95 135 140 145	Remote control
Lighting	Noise level	55 64 67 69	
2 LED lights	Noise level	55 64 67 69	
Grease filter			
Cassettes dishwasher safe			
Ø of air outlet			
150 mm			
Width			
800 mm			
Energy class			
С			





STILO

STILO X 60 RB cod. 110.0360.445 **STILO X 90 RB** cod. 110.0360.447 **STILO X 120 RB** cod. 110.0360.448
















FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.252
· Stainless steel	Air capacity		Upper chimney kit
Controls	IEC point	290 390 455 540	Cod. 112.0157.354
Electronic Led	Pressure	370 480 500 540	
Lighting	Input	100 135 140 145	Remote control
2 LED lights	Noise level	54 58 62 67	
Grease filter			
Cassettes dishwasher safe			
Ø of air outlet			
150 mm			
Width			
600 / 900 / 1200 mm			
Energy class			
В			





STILO ISOLA

STILO ISOLA X 90 RB cod. 110.0360.352 **STILO ISOLA X 120 RB** cod. 110.0360.353















FEATURES	PERFORMANCES		ACCESSORIES
Finish	Speed	1 2 3 INT	Cod. 112.0157.354
·Stainless steel	Air capacity		Remote control
Controls	IEC point	290 390 455 540	
Electronic Led	Pressure	370 480 500 540	
Lighting	Input	100 135 140 145	
2 LED lights	Noise level	54 58 62 67	
Grease filter			
Cassettes dishwasher safe			
Ø of air outlet			
150 mm			
Width			
900 / 1200 mm			
Energy class			
В			

ACCESSORIES

REMOTE BLOWER KIT


REAR AIR OUTLET KIT

REMOTE BLOWER ENERGY cod. 112.0327.007

- City
- Inca Lux 2.0
- Cylindra
- Inca Lux Glass
- Cylindra Isola
- In-Nova Premium - Infinity
- Cylindra Isola Gloss Plus
- Jolie
- Daisy
- Maxima
- Daisy B - Eclipse
- Northia
- Stilo/SP
- Flow
- Stilux
- Flow Isola
- Thalia
- Heaven 2.0
- Vanity
- Heaven Glass 2.0 - Heaven Lite
- Veil
- Victory 2.0
- Heaven Lite Glass

REMOTE BLOWER FABULA cod. 112.0327.008

- Fabula Plus



- T-Light

- Talìka

- T-Light Isola

REMOTE CONTROL

REMOTE CONTROL cod. 112.0157.354

- Black Tie
- Cassiopea Isola
- Corinthia Isola
- Cylindra
- Cylindra Isola - Cylindra Isola
- Gloss Plus
- Fabula Plus - Fabula RB
- Flow
- Flow Isola
- Heaven Compact
- Heaven Lite
- Hoo-B Glass - Ilma Super - Inca Lux 2.0
- Infinity
- Jolie RB
- Stilnovo Lux RB
- Stilo RB
- Heaven Lite Glass - Stilo Isola RB - Hoo-B
 - Ray RB

REAR AIR OUTLET KIT CHLOÈ OLD METAL cod. 112.0490.249

REAR AIR OUTLET KIT CHLOÈ OLD COPPER

cod. 112.0490.250

REAR AIR OUTLET KIT CHLOÈ CAST IRON

cod. 112.0490.261

REAR AIR OUTLET KIT CHLOÈ OLD BRASS

cod. 112.0490.262


REAR AIR OUTLET KIT CHLOÈ DG MATT


cod. 112.0490.263

REAR AIR OUTLET KIT CHLOÈ' CG MATT

cod. 112.0490.264

- Chloè







The kit is matched to the color of the hood

F-LIGHT **DUCTING KIT**

F-LIGHT DUCTING KIT cod. 112.0169.216

- Lybra Plus
- Nest Plus
- Vanilla Plus
- Zoom Plus



FLAT AIR-DUCT SYSTEM

FLAT AIR-DUCT SYSTEM HEAVEN cod. 112.0376.219

- Heaven 2.0
- Heaven Glass 2.0







RECYCLING VERSION KIT

THIS IS TO BE INSTALLED WHEN YOUR HOOD IS BEING USED IN RECYCLING MODE BUT HAS NO CHIMNEY PIECE.

RECYCLING VERSION KIT WH cod. 112.0252.439

- Black Tie WH
- Cocktail WH
- Daisy WH
- Glam-Light PINK/WH
- Glam-Light AL/WG
- Glam-Light WH/T
- Glam-Light WH/WG



- Northia WH
- Vanity WH

RECYCLING VERSION KIT BK cod. 112.0252.442

- Black Tie BK
- Cocktail BK
- Cocktail XS BK
- Daisy BK
- Daisy B BK
- Glam-Light DG/LG
- Northia BK
- Vanity BK



RECYCLING VERSION KIT S-STEEL cod. 112.0327.632

- Black Tie
- Daisy
- City
- Daisy B
- Cocktail
- Infinity
- Cocktail XS
- Jolie



CHIMNEY RECYCLING KIT

THIS IS TO BE INSTALLED WHEN YOUR HOOD IS BEING USED IN RECYCLING MODE AND HAS A CHIMNEY PIECE ATTACHED.

KIT FILTERING CONNECT+WALL SPACER A08

cod. 133.0046.956

CHIMNEY RECYCLING KIT WH cod. 133.0301.599

- Black Tie WH
- Cocktail WH
- Glam-Light WH
- Northia WH
- Vanity WH




CHIMNEY RECYCLING KIT BK cod. 133.0272.534

- Black Tie BK
- Cocktail BK
- Cocktail XS BK
- Glam-Light BK
- Jolie Limited Edition
- Northia BK
- Vanity BK



CHIMNEY RECYCLING KIT S-STEEL cod. 133.0195.967

- Black Tie - City
- e Jolie - Versus
- Cocktail
- Cocktail XS
- Daisy
- Infinity





RECYCLING KIT


C.A. HFH cod. 112.0327.631

- Stilo/SP

RECTANGULAR DUCT RECYCLING KIT cod. 112.0470.541

- Fabula Plus*
- Hoo-B Glass

- Hoo-B





*NOTE

To be purchased in addition or as an alternative to the charcoal filter

PANEL KIT C.A. RECTANGULAR DUCT

cod. 112.0472.396

- Fabula Plus
- Hoo-B
- Hoo-B Glass



NOTE


Long Lasting multi-layer filter to combine with cod. 112.0470.541

NOTE

CHIMNEYS

KIT ALTO H990 X cod. 112.0157.252


- Ray RB
- Stilo RB



UPPER

KIT ISOLA H990 D370 X cod. 112.0157.267

- Cylindra Isola



CHIMNEY KIT THALIA WH MATT cod. 112.0327.633


CHIMNEY KIT THALIA GREEN cod. 112.0329.929

CHIMNEY KIT THALIA PINK cod. 112.0329.961

CHIMNEY KIT THALIA CREAM cod. 112.0329.962


CHIMNEY KIT THALIA BK MATT cod. 112.0437.743

- Thalia




KIT A500+A500 X cod. 112.0250.289

- Black Tie WH
- City
- Cocktail WH
- Cocktail ALMOND
- Cocktail XS WH
- Cocktail XS ALMOND
- Daisy
- Daisy B
- Infinity
- Jolie
- Jolie RB
- Northia



KIT A500+A500 BK cod. 112.0250.290


- Black Tie BK
- Cocktail BK
- Cocktail XS BK
- Vanity BK



UPPER

KIT SUP. STILNOVO H275 X cod. 112.0181.123


- Stilnovo Lux RB



UPPER

KIT SUP. STILNOVO H602 X cod. 112.0158.129

- Stilnovo Lux RB



CHARCOAL FILTERS

F3 CONF. 2 C.A. SMILE cod. 112.0067.944

- Inca Smart HCS
- In-Nova Smart



cod. 112.0329.927

- SkyLift

FHP13 CONF.2 C.A. HIGH PERFORMANCE SKYLIFT

FHP14 CONF.2 C.A. HIGH PERFORMANCE SKYPAD



F4 KIT 2 C.A. 195x139 cod. 112.0157.242

- Talìka



- SkyPad 2.0

cod. 112.0329.928



F4-14B KIT 2 C.A. 195x139 cod. 112.0441.093

- In-Nova Comfort



F16 KIT 2 C.A. cod. 112.0459.452

- Ilma Super
- Luft



F8 CONF.2 C.A.D196 H37 cod. 112.0157.240

- Black Tie - Chloè
- Inca Lux 2.0
- Cocktail
- Inca Lux Glass
- In-Light
- Cocktail XS - Daisy
- Infinity
- Daisy B
- Lithos
- Glam-Light - Heaven 2.0
- Maxima
- Heaven Compact
- Northia
- Heaven Glass 2.0
- Thalia - Vanity
- Heaven Lite
- Veil - Heaven Lite Glass
- F9 CONF.1 C.A.STILO-ALTO/2 cod. 112.0157.243
- Corinthia Isola
- Cylindra
- Cylindra Isola
- Cylindra Isola
- Gloss Plus - Flow
- Flow Isola
- In-Nova Premium
- Stilo/SP
- T-Light
- T-Light Isola



CHARCOAL FILTERS HIGH PERFORMANCE

FHP8 CONF.2 C.A. HIGH PERFORMANCE cod. 112.0158.127

- Arkea Plus
- Black Tie
- Chloè
- Cocktail
- Cocktail XS
- Daisy
- Daisy B
- Glam-Light
- Heaven 2.0
- Heaven Compact
- Heaven Glass 2.0
- Heaven Lite
- Heaven Lite Glass

- Inca Lux Glass
- In-Light
- Infinity
- Jolie
- Lithos - Lybra Plus
- Maxima
- Northia
- Thalia
- Vanilla Plus
- Vanity
- Veil
- Zoom Plus
- Inca Lux 2.0

CHARCOAL FILTERS LONG LASTING

FLL8 CONF.2 C.A. LONG LASTING D196 H37

cod. 112.0185.278

- Arkea Plus
- Black Tie
- Chloè - Cocktail
- Cocktail XS
- Daisv
- Daisy B
- Glam-Light
- Heaven 2.0 - Heaven Compact
- Heaven Glass 2.0
- Heaven Lite
- Heaven Lite Glass

- Inca Lux Glass
- In-Light
- Infinity
- Jolie
- Lithos
- Lybra Plus
- Maxima - Northia
- Thalia
- Vanilla Plus
- Vanity
- Veil
- Zoom Plus
- Inca Lux 2.0

FLL9 CONF.1 C.A. LONG LASTING EASY CUBE

- T-Light

- T-Light Isola

cod. 112.0185.276

- Corinthia Isola
- Cylindra
- Cylindra Isola
- Cylindra Isola Gloss Plus
- Flow
- Flow Isola
- In-Nova Premium
- Stilo/SP



FLL12 CONF. C.A. FABULA cod. 112.0261.258

- Fabula Plus



FLL18-90 KIT C.A. 90 CM cod. 112.0471.608

FLL18-120 KIT C.A. 120 CM cod. 112.0471.609

- Heaven 2.0 Slim
- Heaven Glass 2.0 Slim
- High-Light
- Victory 2.0




FLAT AIR-DUCT SYSTEM Ø 150 MM OR EQUIVALENT

RACCORDO RCR 220x90 cod. 112.0459.428

Flat duct connector 220x90 mm






CURVA CRC 90 220x90 cod. 112.0459.451

90° Elbow bend 220x90 mm






CURVA CRO 90 220x90 cod. 112.0459.455

Horizontal 90° bend 220x90 mm






RACCORDO RRC 220x90 cod. 112.0459.429

Round to rectangular adapter 220x90 mm






CURVA CRV 90 220x90 cod. 112.0459.453

Vertical 90° bend 220x90 mm






FASCETTA FRF 220x90 cod. 112.0459.456

Bracket 220x90 mm





CHOOSE THE RIGHT HOOD


The necessary extraction capacity is determined by the volume of the kitchen. An effective hood changes the air of the kitchen 10 times per hour. A powerful motor is quieter and uses less energy because it is effective at low speeds.

A hood does not create noise disturbance if its capacity is sufficient without exceeding 55 dB(A) of sound power.

A powerful motor can be efficient even at lower, quieter

speeds. 1 Fan Handbook - F. Bleier 1998 Example: A 15 m2 kitchen which is 3 m tall requires a hood which aspirates at least 450 m3/h. Infact: 15 m2 x 3 m x 10 = 450 m3/h

Now consult the performance table found in the product catalogue. The hood is efficient if an equal or higher capacity value is found in one of the speed columns.




10 kitchen changes EFFECTIVENESS = kitchen m² × height × of air

Speed	1	2	3	4	INT
Air capacity IEC point	110	195	260	313	430
Pressure	-	-	-	-	-
Input	30	45	55	70	100
Noise level	48	53	58	62	69


INSTALLATION

Proper installation begins with an inspection. When choosing a hood, you should know:




Kitchen volume (which determines the necessary aspiration capacity).

See section "Choosing the right




Length of the cooking top (the hood is generally as long as the cooking top area).



The position and distance of the exit hole (very long and very curved right-angled tubes limit hood efficiency).

Installation distance



The hood is to be installed at a minimum distance of 65 cm from the cooking top, except for particular models where is specified in the technical drawing and instructions manual. ATTENTION: the product guarantee will not be considered valid if this distance is not respected.

spected.
The hood may not reach declared performance levels if the distance from the cooking top exceeds 75 cm.

Some vertical-installation models (ex. Mirror, Matrix) are to be installed lower. Check the product's

technical manual.

Inspection

- 1 Turn on the motor
- 2 Switch on the lights

If the hood is an extraction hood, verify that it is properly connected to the exit tubing.

If the hood is a filtering hood, verify that the charcoal filters have been inserted.

First cleaning


- Remove the protective films
- Remove impurities with a damp sponge and a small amount of neutral soap
- Rinse with a damp cloth
- Dry with a soft cloth. If the hood is in stainless steel, continue with
- a steel glaze
- You can give stainless steel hoods a protective treatment with the Faber Clin&Clin tissue




Faber hoods are easy to install because they have EASY CUBE:




Hang the hood



Align



Connect tubing



Insert the chimney

USE AND MAINTENANCE



Switch on the hood a minute before cooking begins to create air flow that channels fumes and steam toward the aspiration surfaces.

If necessary, leave the hood switched on even after cooking is finished so that all steam and odours can be properly aspirated.



- Wash the metal anti-grease filters by hand or in the dishwasher every two months¹
- Replace synthetic anti-grease filters every two months
- Regular filter maintenance guarantees efficient hood use

ATTENTION: grease deposited on the filters is inflammable: be sure to perform regular maintenance

¹ These intervals of time refer to a regular use of the hood, approximately 3 hours per day



Hood cleaning

- Remove impurities with a damp sponge and a small amount of neutral soap²
- Rinse with a damp cloth
- Dry with a soft cloth, if the hood is in stainless steel, follow the steel brushing
- Clean the internal hood conduit once a year
- ² Acid-based cleaning products can damage hood surfaces

ANTI-ODOURS FILTERS

Long lasting filter

High performance



3 YEARS

Faber has developed a new, re-usable active carbon filter. Thanks to the multi-layer technology, the Long Lasting filter further increases filtration efficiency, with the double layer using an initial pre-filtration to capture the largest particles, and a second, more concentrated filtration to guarantee optimal air cleanliness.

The filter can be washed in the dishwasher every 3-4 months¹, for a maximum of 3 years and dries at room temperature in a vertical position to allow the water to drain out. Alternatively, it can be placed in an oven at 50°C.



High-efficiency filter with a highly-concentrated carbon micro-granular structure that can guarantee more than 80% filtration capacity of intake fumes and a duration of up to 6 months, double that of a normal charcoal filter, making for economic savings of more than 20%.

CLIN & CLIN CLEANING LINE

Clin&Clin revitalising paste

Clin&Clin protective tissues



Removes marks, spots and small rust stains caused by daily use, restoring a natural shine to steel surfaces.



Protect and maintain the beauty of steel surfaces over time. Practical and disposable. To be applied on clean, dry surfaces.

¹ Normal use cooker hood, by around 3 hours per day

QUALITY AND SAFETY

Faber hoods benefit from 60 years of competence in the treatment of kitchen air

- We were the first in the kitchen hood sector to obtain an ISO 9001 company qualitysystem certificate.
- System integrated with Quality, Safety and Environment certified by SGS respecting the ISO 9001:2000, OHSAS 18001 and ISO 14001 norms.
- We have received the SGS Excellence Certificate, the absolute first in the world, number 001.
- All Faber hoods conform to European safety standards (EC mark of conformity), and have also been certified by the IMQ, a reliable, independent organisation further guaranteeing clients on quality (IMQ mark of security).

FABER HOODS ARE DESIGNED FOR SAFETY



Hammered internal edges and tempered glass to avoid risks of cutting.



Thermo-protected motors and self-extinguishing plastics help avoid any risk of fire.

Electronics are solid state, cables and connections are all placed correctly to avoid electric shock or dangerous sparks.

All Faber hoods have undergone safety and performance tests.

Aspiration and noise capacity have been measured according to standard norms:

- EN 61591
- EN 60704-3

unique specifications for surveying kitchen hood performance.

ATTENTION: Comparisons between different brand hoods should be carried out on complete data obtained according to these standards. The Faber laboratory is NEMKO and IMQ certified.

ASSISTANCE

All Faber products are sold with a 2-year guarantee, covering parts and labour. Defects caused by incorrect installation are not covered by the warranty.

Call 0845 548 3130 for a brochure or more information



Call 0845 548 3132 for parts, servicing and warranty

KitchenEX are the only approved UK supplier of Faber Cooker hoods.



SPECIAL FINISHES



Zebra-Striped glass

LYBRA PLUS

Limited Edition

The images are indicative only and are not fully representative of the product finish.

Limited Edition

Tibetan Silver

PAREO PLUS

VEIL

The performance shown in this catalogue is declared in accordance with the new Code of Conduct signed by the most qualified European manufacturers members of CECED (European Committee of Domestic Equipment Manufacturers), a strict code for transparency which establishes clear rules to measure air flow and noise level for hoods, common to all cooker hoods manufacturers:

- air capacity according to IEC/EN 61591 method (with the hood fitted using a ducting pipe)
- noise level according to IEC/EN 60704-3 method (sound power)

FINISHES

AL almond

AL/WG almond/warm grey

AM/X metal aluminium/stainless steel handle

BK black

BK GLASS/A black glass/aluminium

CG country grey
CI cast iron
CT cross titanium
DG dark grey

DG/C dark grey/concrete
DGC dark grey concrete

LG light grey

LG/X light grey/stainless steel handle

OB old brass
OC old copper
OM old metal

SS black body/stainless steel strip

WG warm gray WH white

WH MATT/TS white matt/tibetan silver

X stainless steel

X/OM stainless steel/old metal X/V stainless steel/glass

PERFORMANCE

SPEED Speed

M⁵/H Air capacity IEC point

PA Pressure

W Input

A) Noise level